


HIGH VOLUME LOW PRESSURE GRAVITY FEED 980H

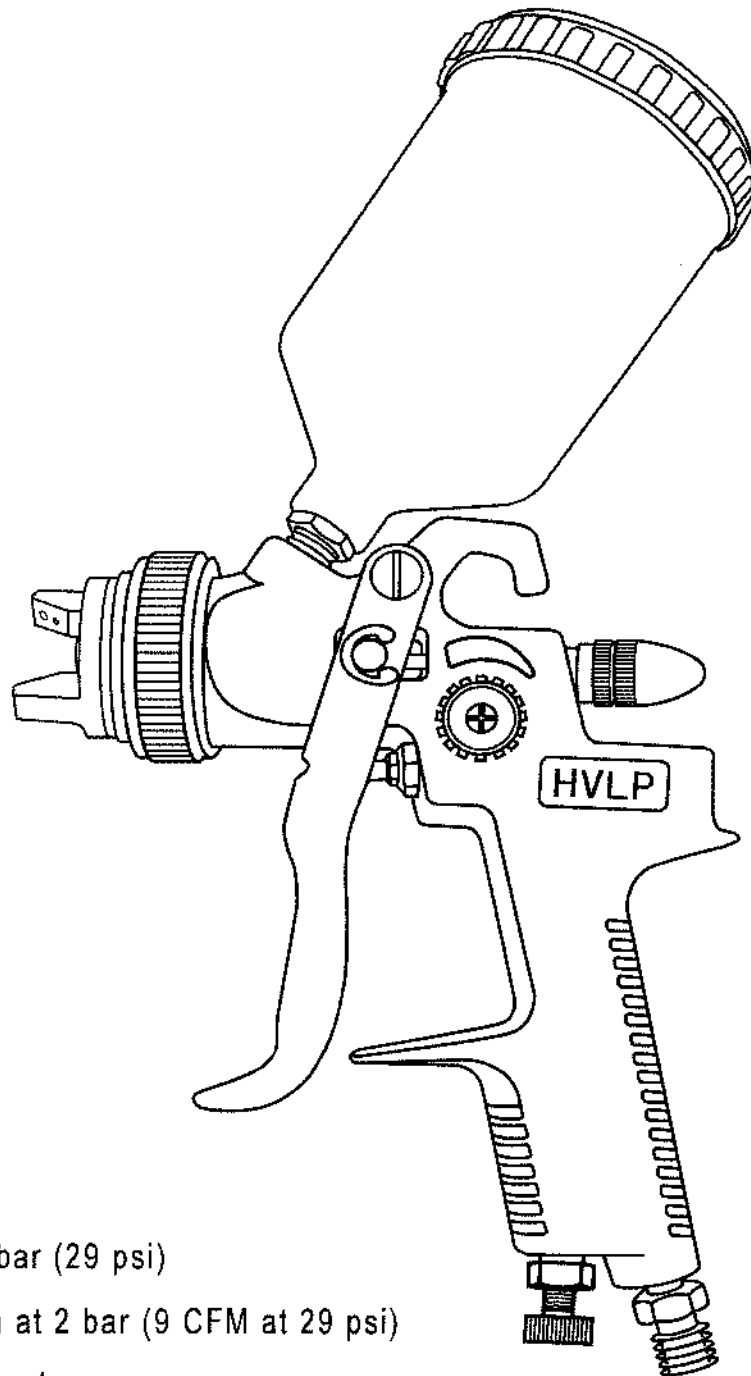

TECHNICAL DATA

Suggested air pressure : 2 bar (29 psi)

Air consumption : 255 L/min at 2 bar (9 CFM at 29 psi)

Weight : 545 grams for gun only

164 grams for 0.6 nylon cup only • Fluid Adaptor 5/8"-11


Spray gun distance to object : about 25-28 cm

The paint viscosity is different for the paint properties and painting condition.

The best suggestion is using 1.3 fluid nozzle with the viscosity at 14~20 second by (DIN-4)

Nozzle sizes available : 1.0MM,1.2MM,1.4MM,1.5MM,1.7MM,1.9MM,2.2MM

980H

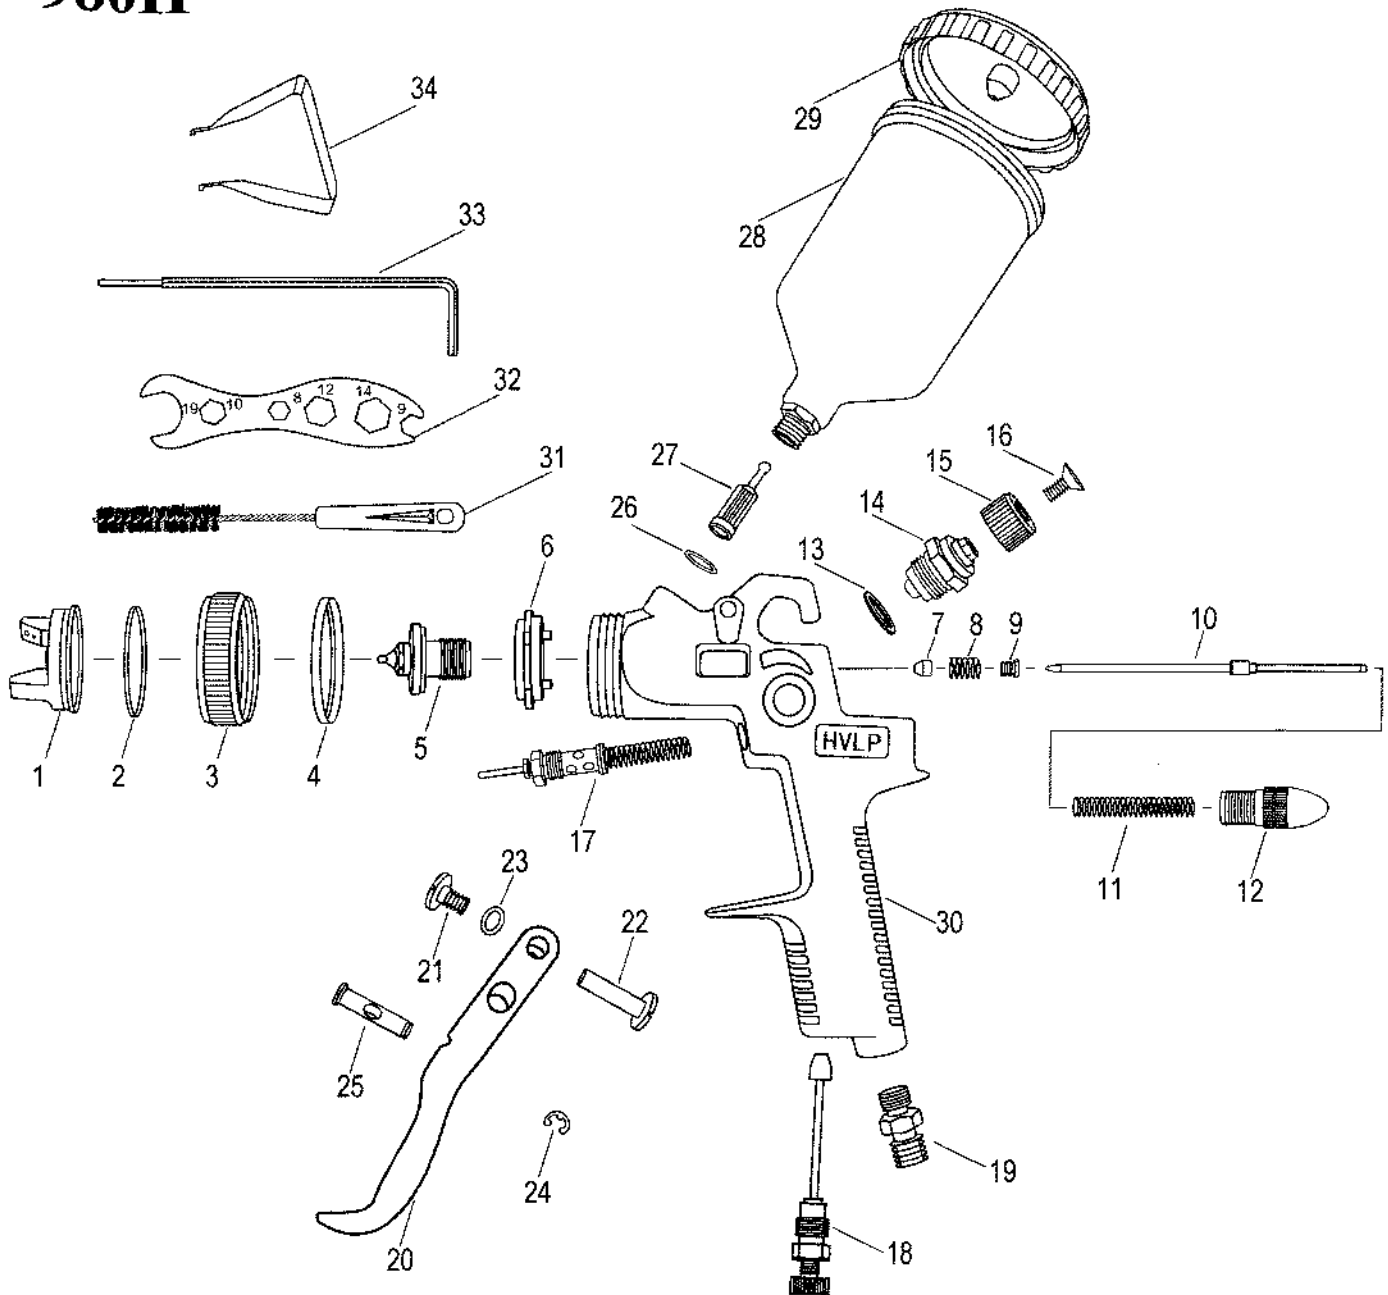

NO.	DESCRIPTION	NO.	DESCRIPTION	NO.	DESCRIPTION	NO.	DESCRIPTION
1.	Air Cap	10.	Paint Needle	19.	Air Connection	28.	0.6 Nylon Cup
2.	C Clamp	11.	Spring	20.	Trigger	29.	Cup Lid
3.	Brass Cap	12.	Fluid Control Knob	21.	Trigger Screw	30.	Gun Body
4.	Plastic Packing	13.	Brass Gasket	22.	Trigger Screw	31.	Brush
5.	Fluid Nozzle	14.	Paint Control Valve	23.	Spring Washer	32.	Spanner
6.	Gasket	15.	Control Knob	24.	E Clamp	33.	Hex Wrench
7.	Teflon Seal	16.	Countersunk Screw	25.	Pin	34.	Tool for #06 Only
8.	Spring	17.	Air Valve Ass'y	26.	Teflon Washer		
9.	Screw	18.	Air Adjusting Valve Ass'y	27.	Material Sleeve		